
RF 35mm F1.4L VCM

BRING YOUR WORLDS TOGETHER



35mm F1.4 hybrid prime lens

Smooth action Iris Ring⁴

11-blade circular aperture

Aspheric and UD elements

VCM and Nano USM motors

Custom button and Control ring











⁴ Iris ring is inactive for controlling aperture in still photo shooting when using the lens with EOS R system cameras released before May 2024.



Seamless multimedia artistry in one design

The 35mm focal length offers a sweet spot in perspective. A separate Iris Ring brings smooth manual iris control when filming¹, while an 11blade aperture gives outstanding depth-of-field control, with minimal focus breathing for incredible image quality.




A brilliant creative performance, even in low light

Keep shooting when light levels drop thanks to an f/1.4 aperture for a bright image. The prime lens design puts the focus on your subject, with the option for front and rear filters for extra creative control.

Crystal-clear imaging with rapid precision

Enjoy superb image quality thanks to aspheric and UD lens elements with Super Spectra and ASC coatings. A fast Nano USM combined with even faster Voice Coil Motor (VCM²) technology delivers fast and precise focusing.

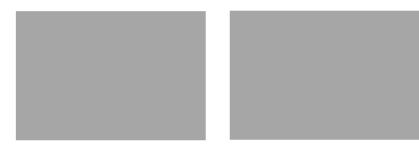

Superb reliability with intuitive handling

Work tough in challenging conditions thanks to an L-series design housing high-quality glass elements. A fluorine coating prevents dirt sticking to the front element while a dedicated Lens Control Ring and customisable Lens Function Button bring you personalised control.

Thoughtful, lightweight design

Be more agile when you're shooting thanks to better balance and lightweight handling. The RF 35mm F1.4L VCM is lighter than its EF predecessor and being a hybrid, it's well-suited for fitting into smaller video rigs.

PRODUCT RANGE



RF 24-105mm F2.8L IS USM Z RF 35mm F1.4L VCM

¹ When shooting movies and operating the Iris Ring whilst AF is in operation, on rare occasions, focusing and aperture values could be inconsistent when using EOS R system cameras released before May 2024

Canon

² Important: The Voice Coil Motor in RF 35mm F1.4L VCM emits a low-level magnetic field. While generally safe to use, we advise consulting your doctor if you have a pacemaker or any other medical device to address any concerns. When the lens is not connected to the camera or when the camera is off may cause internal noise from the lens components. This is normal and not a malfunction. Minor movements during transportation do not affect performance.

TECHNICAL SPECIFICATIONS

OPTICAL FEATURES/ SPECIFICATIONS	
Image Size	Full Frame
35mm film equivalent length (mm)	-
Angle of view	54°, 38°, 63°
(horzntl, vertl, diagnl)	
Lens Construction	14/11
(Elements/Groups)	
Special Optics	2x UD
	2x GMo Aspherical Iris Ring (Video) ⁴
Special features	0, ,
No. of diaphragm blades	11
Minimum Aperture	16
Closest Focusing Distance (m)	0.28
Maximum Magnification (x)	0.18
Control Ring	Yes
Image stabilizer OIS ¹	-
Image stabilizer IBIS x OIS ¹	7
AF actuator	Nano USM, VCM⁵
Coatings	ASC, Super Spectra
Fluorine	Front
PHYSICAL SPECIFICATIONS	
Dust/moisture resistance ³	Yes
Exterior coating	-
Filter diameter (mm)	67
Max. diameter x length (mm) ²	Approx. 76.5x 99.3
Weight (g)	555
ACCESSORIES	
Lens cap	E-67II
Lens hood	EW-73F
Lens case/pouch	LP1219
Rear cap	Lens Dust Cap RF
Extender Compatibility	Not Compatible
Other Accessories	Rear filter holder
1	

- Footnotes: [1] Tested under CIPA standards
- ^[2] Lens dimensions when in retracted state
- [3] Lenses with dust/moisture resistance are fitted with a rubber ring on the lens mount which may cause slight abrasion of the camera mount. This in no way effects either the lens or camera performance.
- [4] Iris ring is inactive for controlling aperture in still photo shooting when using the lens with EOS R system cameras released before May 2024.
 When shooting movies and operating the Iris Ring whilst AF is in operation, on rare occasions,
- focusing and aperture values could be inconsistent when using EOS R system cameras released before May 2024.
- Important: The Voice Coil Motor in RF 35mm F1.4L VCM emits a low-level magnetic field. While generally safe to use, we advise consulting your doctor if you have a pacemaker or any other medical device to address any concerns.
 - When the lens is not connected to the camera or when the camera is off may cause internal noise from the lens components. This is normal and not a malfunction. Minor movements during transportation do not affect performance.



Canon Ireland 3006 Lake Drive Citywest, Saggart Co. Dublin, Ireland Telephone No: 01 2052400 Facsimile No: 01 2052525 canon.ie

Canon (UK) Ltd The Bower 4 Roundwood Avenue Stockley Park Uxbridge UB11 1AF


Canon Inc. canon.com Canon Europe canon-europe.com English edition Canon Europa NV 2024

BRING YOUR WORLDS TOGETHER

RF 35mm F1.4L VCM

RF 35mm F1.4L VCM sits in the L-series Pro Lenses range and joins the RF 24-105mm F2.8L IS USM Z as part of Canon's new Hybrid lens lineup, designed for both stills and video.

Sales Start Date: TBC



Product details


Product Name	Mercury Code		Recommended Retail Price
RF 35mm F1.4L VCM	6710C005AA		
LENS HOOD	6711C001AA	4549292235050	



BRING YOUR WORLDS TOGETHER

RF 35mm F1.4L VCM

RF 35mm F1.4L VCM sits in the L-series Pro Lenses range and joins the RF 24-105mm F2.8L IS USM Z as part of Canon's new Hybrid lens lineup, designed for both stills and video.



Measurement / logistic information

Product Name	Mercury Code	Pack type	Pack description	Quantity per pack	Length (cm)	Width (cm)	Height (cm)	Net Weight (kg)	Gross Weight (kg)
RF 35mm F1.4L VCM	6710C005AA	EA	Each	1	13.7	13.7	26.3	0.666	0.87938
		СТ	Carton	6	43	29.2	34.9	-	6.20
		EP	Euro Pallet	72	120	80	117.7	-	89.4
			Layers per Pallet	3					
			Cartons per Layer	4					
			Products per Layer	24					
LENS HOOD 6711C001AA	EA	Each	1	10.2	10.3	6.3	0.033	0.05872	
		СТ	Carton	32	44.3	29.4	23.8	-	2.56
		EP	Euro Pallet	640	120	80	132.5	-	66.2
			Layers per Pallet	5					
			Cartons per Layer	4					
			Products per Layer	128					



BRING YOUR WORLDS TOGETHER

RF 35mm F1.4L VCM

RF 35mm F1.4L VCM sits in the L-series Pro Lenses range and joins the RF 24-105mm F2.8L IS USM Z as part of Canon's new Hybrid lens lineup, designed for both stills and video.

What's in the box

RF 35mm F1.4L VCM

- Lens Cap E-67II
- Lens Dust Cap RF
- Lens Hood EW-73F
- Lens Case LP1219
- Rear filter Holder
- User Manual



